


2-JAW PARALLEL GRIPPERS WITH LONG STROKE

HRC-02-093677

▶ PRODUCT SPECIFICATIONS




▶ Gripping force diagram

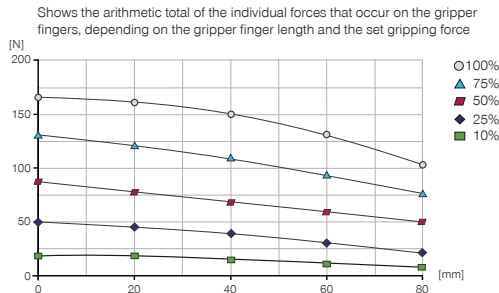

▶ Forces and moments

Displays static forces and moments that can also have an effect, besides the gripping force.



Mr [Nm]	25
Mx [Nm]	25
My [Nm]	25
Fa [N]	500

▶ TECHNICAL DATA

Order no.	HRC-02-093677
Suitable for robot type	Yaskawa HC10 / HC10 DT**
HRC design according to ISO/TS 15066	Yes
HRC form	collaborative
Cable management	internal
Type of drive	electrical
Control	IO-Link
Integrated position sensing	Using process data
Stroke per jaw [mm]	40
Stroke per jaw, adjustable [mm]	40
Self locking mechanism	-
Gripping force min. [N]	15
Nominal gripping force [N]	165
Gripping force in accordance with ISO/TS 15066 [N]*	<140
Control time [s]	0.125
Dead weight of mounted gripper finger max. [kg]	0.3
Length of the gripper fingers max. [mm]	80
Jaw speed in force mode max. [mm/s]	24
Jaw speed in positioning mode max. [mm/s]	55
Repetition accuracy +/- [mm]	0.05
Operating temperature [°C]	5 ... +50
Voltage [V]	24
Current consumption max. [A]	1.6
Minimum positioning path per jaw [mm]	2
Protection to IEC 60529	IP40
Weight [kg]	1.6

* Value based on the parameters described in the ISO/TS 15066, determined with a force measuring device certified by the DGUV (German Social Accident Insurance)

** Adapter plates required for HC10: APR000026 + APR000027 / Adapter plate required for HC10 DT: APR000027

For more information, refer to our Yaskawa brochure.

▶ RECOMMENDED ACCESSORIES



Adapter plate
APR000026



Adapter plate
APR000027

▶ TECHNICAL DRAWINGS

