


IG-43GM

01&02 TYPE



REDUCTION RATIO	L	REDUCTION RATIO	L
1/4	26.15	1/212~1/864	46.45
1/14~1/24	32.95		
1/49~1/144	39.75		

外形尺寸 APPEARANCE SIZE

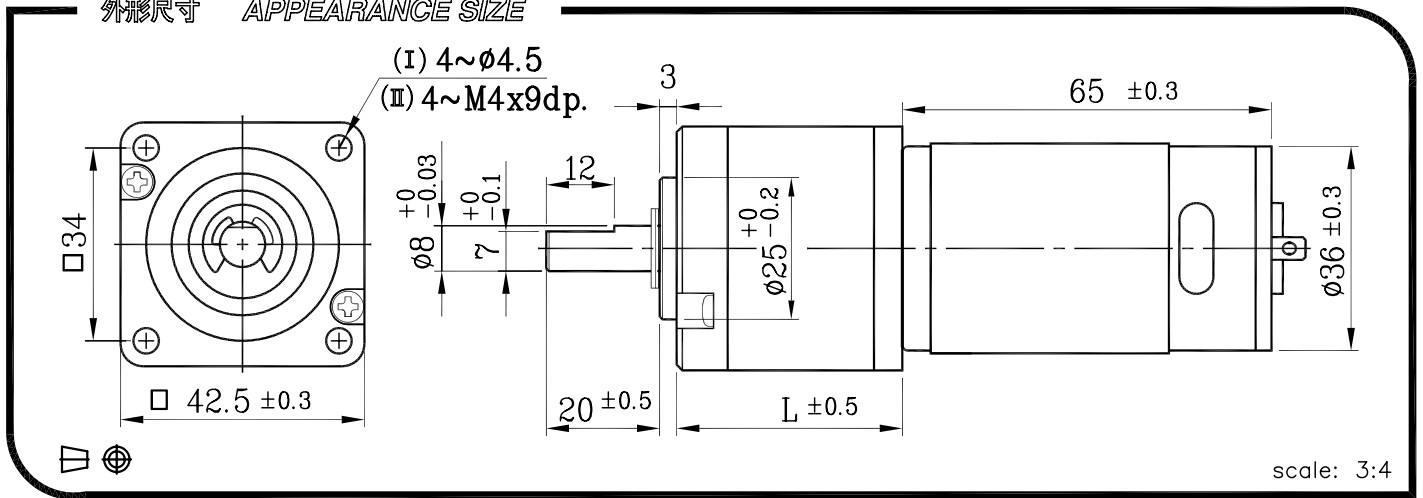

GEARED MOTOR TORQUE/SPEED

	減速比 Reduction ratio	1/4	1/14	1/17	1/24	1/49	1/61	1/84	1/104	1/144	1/212	1/294	1/504	1/624	1/720	1/864				
		1.0	3.0	3.6	5.2	9.2	11	15	19	20	25	25	30	30	30	30				
12V	定格扭力(Kg-cm) Rated torque	1.0	3.0	3.6	5.2	9.2	11	15	19	20	25	25	30	30	30	30				
	定格回轉數(rpm) Rated speed	1250	363	293	212	103	83.5	60.5	49	38	25.4	18.9	11.2	8.8	8.0	6.5				
24V	定格扭力(Kg-cm) Rated torque	0.9	2.6	3.1	4.5	8.0	10	14	17	20	25	25	30	30	30	30				
	定格回轉數(rpm) Rated speed	1290	375	302	218	107	86.5	62.5	50.5	39	26.2	18.8	11.2	8.8	8.0	6.5				

馬達單體型式 / MOTOR DATA

定格電壓 Rated volt (V)	定格扭力 Rated torque (g-cm)	定格回轉數 Rated speed (rpm)	定格電流 Rated current (mA)	無負荷回轉數 No load speed (rpm)	無負荷電流 No load current (mA)	定格出力 Rated output (W)	重量 Weight (g)
12	320	5090	≤ 2100	6000	≤ 350	17.09	266
24	280	5250	≤ 900	6000	≤ 170	15.56	266

馬達單體特性圖 / MOTOR CHARACTERISTICS

