


IG-52GM

01&02 TYPE



REDUCTION RATIO	L	REDUCTION RATIO	L
1/3~1/4	53.0	1/150~1/676	99.5
1/12~1/19	68.5		
1/43~1/113	84.0		

外形尺寸 APPEARANCE SIZE

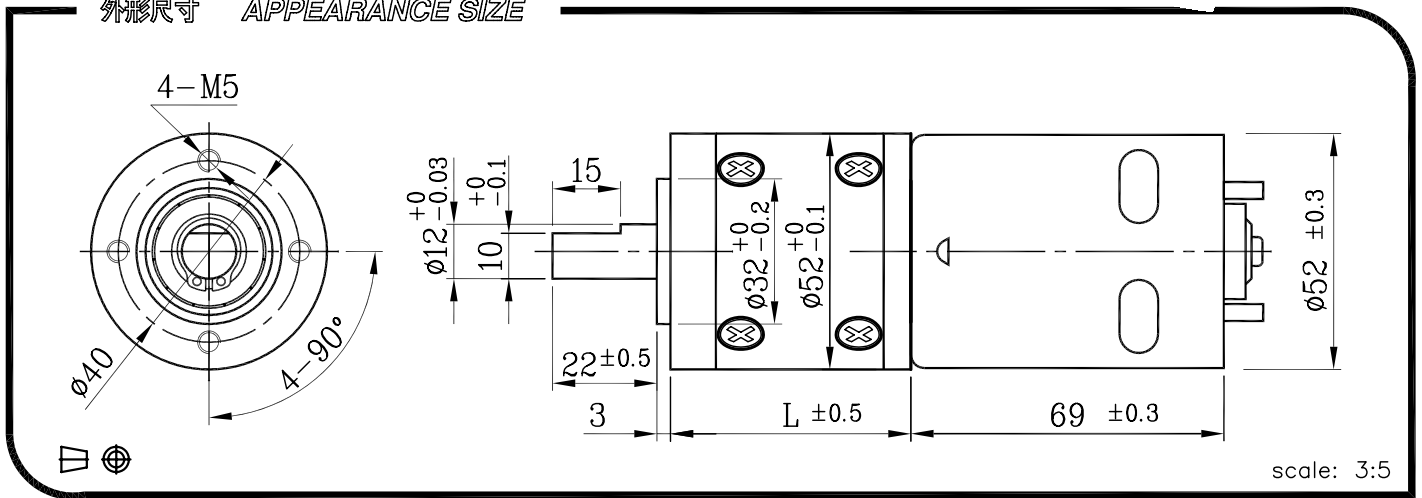

GEARED MOTOR TORQUE/SPEED

	減速比 Reduction ratio	1/3	1/4	1/12	1/15	1/19	1/43	1/53	1/66	1/81	1/100	1/113	1/150	1/230	1/285	1/353	1/488	1/546	1/676		
		3	4	12	15	19	43	53	66	81	100	113	150	230	285	353	488	546	676		
12V	定額扭力(Kg-cm) Rated torque	1.3	1.65	4.1	5.0	6.3	12	15	19	23	28	32	36	55	68	84	100	100	100		
	定額回轉數(rpm) Rated speed	1568	1264	450	369	305	130	105	85	68.5	55.5	49.5	37	24	19.5	15.5	11.5	10.4	8.3		
24V	定額扭力(Kg-cm) Rated torque	1.8	2.2	5.5	6.8	8.5	16	20	25	31	39	44	48	74	92	100	100	100	100		
	定額回轉數(rpm) Rated speed	1524	1230	444	359	290	127	102	83	66.5	54	48	36	23.5	19	15.5	11.6	10.5	8.4		

馬達單體型式 / MOTOR DATA

定額電壓 Rated volt (V)	定額扭力 Rated torque (g-cm)	定額回轉數 Rated speed (rpm)	定額電流 Rated current (mA)	無負荷回轉數 No load speed (rpm)	無負荷電流 No load current (mA)	定額出力 Rated output (W)	重量 Weight (g)
12	480	5600	≤ 5600	6000	≤ 1750	58.6	480
24	650	5450	≤ 2750	6000	≤ 750	48.3	480

馬達單體特性圖 / MOTOR CHARACTERISTICS

